


2014-2-28

## ZAF102

### EXPLOSION PROOF/CORROSION PROOF CAMERA HOUSING FOR HAZARDOUS AREA

#### MAIN FEATURES

- Stainless steel 304 or 316L material
- Enclosure Protection: IP68
- Exd II CT6 & DIP A20, TA, T6
- Applicable for the circumstances of explosive gas, oil, powder, such as hydrogen (H<sub>2</sub>) and hydrocarbon gas in the plants (except C<sub>2</sub>H<sub>2</sub>).
- Fit for gas zone 1, zone 2, dust zone 21, 22
- Optional power input: DC12V, AC24V, AC100~240V, POE power supply
- Working Current: ≤1000mA
- Optional lower temperature range: -50 to 65 °C

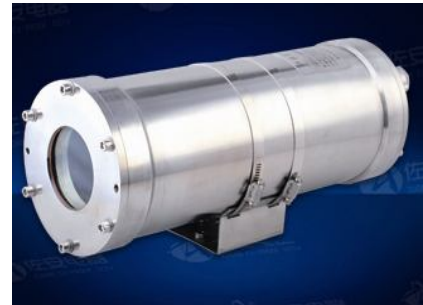


ZAF102 HOUSING




ZAF102 CORROSION PROOF PAINTING

Model	ZAF102-S	ZAF102-SS
Atmospheric pressure	80KPa~110Kpa	
Ambient Temperature	-20°C~+60°C	
Relative Humidity	≤95% (+25°C)	
Ex-proof mark	Ex d II CT6 & DIP A20, TA, T6	
Explosion proof Certified	CNEEx 12.0004	
Window glass	8mm thickness tempered glass	
Ingress Protection	IP68	
Optional Voltage Input	AC24V, AC100~240V, DC12V, POE POWER SUPPLY	
Overall dimension	421*132*155mm	
Net weight	7.8kg	
Housing Material	Stainless Steel 304	Stainless Steel 316L
Auto-heating, cooling kit	-20 to +60°C	
	-50 to +65°C (lower temperature version)	

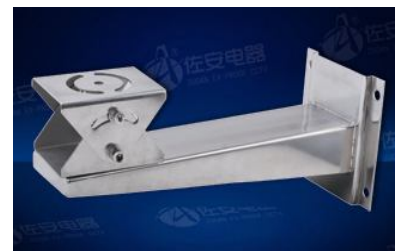

ZAZ100B WALL BRACKET

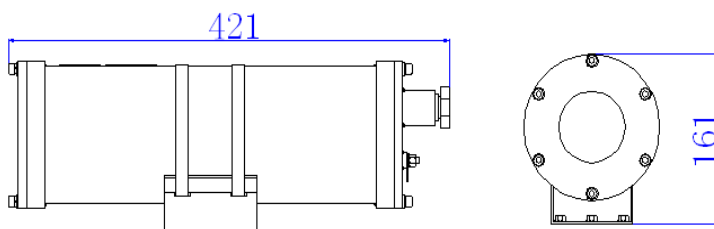

FLEXIBLE TUBE

specifications subject to change without notice.© ZUO AN all rights reserved.

skype: cookee.lee

tel +86-15295033359